




Specification

Nom. Capacity	Tare	MGW
26,000 ltr (6860 USgal)	4,300 kg	34,000 kg
Working Pressure:	2.65 Bar	
Test Pressure:	4 Bar	
ISO Dimensions:	L6058mm x W2048mm x H2591mm (20' x 8' x 8' 6")	
Structural Materials:	MNR 16N	
Bund System:	Cavity wall capacity to high level	
Approvals:	UN coded T7, RID/ADR, USDOT, AAR 600, UIC, TIR, TC	
Fuels:	UN1202, UN1203	

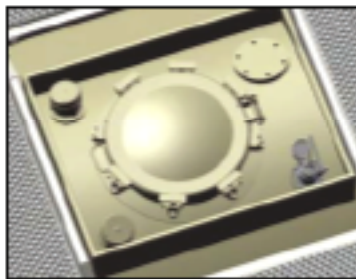

Manway Area

Standard Equipment (Fortvale or Equal)

Manway:	500mm Dia.
Pressure Device:	2 off—2 1/2" Prevac
Discharge Valve:	Fortvale Freeflow
Air Valve	1 1/2" Air Valve
High Access:	Ladder, Walkway and Hand rail
Document	Document Holder

Optional Equipment

- Calibrated Dipstick in Manway Area & Calibration plate
- Overfill Valve



Discharge Area

Bulk Containers

20ft and 40ft Full Opening Side Door Containers

Waste-management Containers

Open-top, GPs & Flatracks

LPG T50 tanks

27 tonne Bitumen tanks

28,000 ltr Lubricant & Oil Tanks

70 m3 Petro-chem storage Tanks

26,000 ltr tank containers

28,000 ltr Food tanks

P.O. Box 577
Lincroft, NJ 07738-0577

Tel: 732-389-1836
Fax: 732-389-1837

E-mail: sales@transworldequipment.com
Website: transworldequipment.com