



DIMENSIONS and capacities

Weight (+/- 3%) 11,200 lbs
10,900 lbs w/Aluminum wheels
Length / Width 48' x 102"
Upper Coupler 1/4" Hi Tensile Steel
Kingpin 30" From Nose

Lightweight Steel Flatbed Trailer



FRAME and related components

80,000 lbs Distributed • 55,000 lbs in Coil Area • 2-1/4" Camber
High Strength Steel • Frame -140ksi • Side Rail and Web -100ksi • Crossmembers -80ksi

FLOORING

Flooring Extruded Aluminum
3 Apitong Nailers


SUSPENSION and related components

Axle Spread 122" Fixed
Steel Wheels • Cooper Tires



SIDE RAIL

6061 T6 Aluminum Winch Track
Stake Pockets 24" on Center

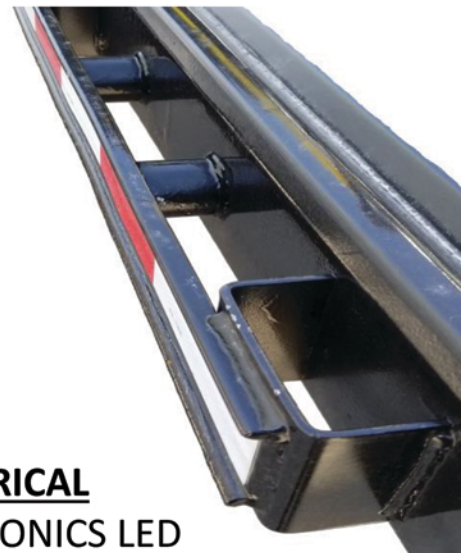

INCIDENTALS

Four White Mud Flaps w/Logo
Conspicuity Tape Installed in Recess on Rub Rails
Registration Holder
Colors Available
5-Year Limited Warranty

ELECTRICAL

OPTRONICS LED
PHILLIPS Wiring Harness